


Clear Polyester Film

50-Micron – Clear – Internal

Code: TSA-50CL-iSR

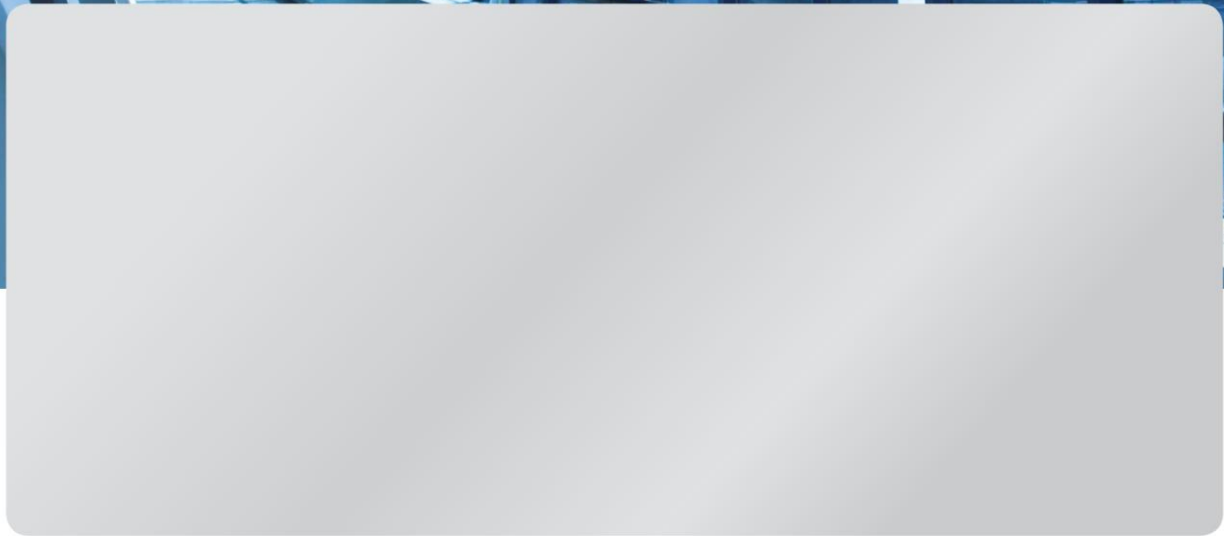

Performance Data

Total Solar Energy

Transmitted	81%
Reflected	7%
Absorbed	12%

Visible Light

Transmitted	86%
Reflected	8%

Ultra-Violet Rejected	<98%
-----------------------	------

Shading Coefficient	0.94
---------------------	------

Total Solar Energy Rejected	19%
-----------------------------	-----

Product Warranty (as installed to glass)	10 years, unprinted
---	---------------------

Physical Properties

Description	Clear
Film Thickness	50-Microns (2-thou)
Structure	Single-Ply
Tensile Strength	n/a
Break Strength	n/a
Adhesive Type	Acrylic Pressure Sensitive
Peel Strength	n/a

Specification:

The polyester window film is to be Opalux® TSA-50CL-iSR, as manufactured by Opalux® (www.opaluxwindowfilms.com). The film is to be installed to the interior surface of the glass, and the unique product roll numbers used are to be registered in accordance with the manufacturer's warranty procedure.

Notes:

Whilst offering a degree of improved safety when installed to glass, TSA-50CL-iSR does not meet any current BS or EN glass safety standards. Test results are produced from film applied to 3mm clear single glass. Performance data is subject to change without prior notice. It is the users' responsibility to ensure the product is suitable for the intended use. The seller shall not be liable for any direct, indirect or consequential loss or damage howsoever arising.